

V1

Operation Manual

Sport Timer with alarm, chronograph, 1/100 sec, lap & split control

Features:

1. Hour, Minute, Second & Day of the week.
2. Month & Date.
3. Chronograph with 1/100 second, with lap/split control.
4. 4 year Calendar.
5. Beep, Beep alarm with chime & snooze.
6. 30 second correction for synchronization.
7. 12/24 hour display for user's option.
8. Maximum counting: 23 hours, 59 minutes, 59 seconds.

Switch Control:

Normal readout: Hour, Minute, Second & Day of the week.

1. Press and hold #1 to see Month/Date
2. Press and hold #2 to see Alarm Time
3. Press #3 to see Mode control for chronograph function
4. Then press #3 to set Alarm
5. Again press #3 to set Normal Time
6. Again press #3 to see Normal Time readout

Setting operation:

Normal Time:

1. Press #3 3 times to get normal time setting mode. The 'second' will start flashing. Press #1 to set the seconds
2. Press #2 to see "Minute" flashing, press #1 to advance Minute
3. Press #2 to see "Hour" flashing, press #1 to advance Hour
4. Press #2 to see "Date" flashing, press #1 to advance Date
5. Press #2 to see "Month" flashing, press #1 to advance Month
6. Press #2 to see "Day of week" flashing, press #1 to advance Day of Week
7. Finally, press #3 once to return to normal time readout.

12/24 Hour option:

While setting 'Hour', 12/24 hour readout may be obtained by turn around cycle, i.e. AM/PM in 12 hour format and "H" in 24 hour format.

Alarm Time:

1. Press #3 twice to get the alarm time "Hours" to start flashing, press #1 to advance.
2. Press #2 once to get alarm time "Minute" to start flashing, press #1 to advance.
3. Finally, press #3 once to return to normal time readout.

Chronograph:

1. Press #3 to get into the "Chronograph" mode, by pressing #1, you can now start or stop on any counting event.
2. During counting, press #2 will enter into lap time mode, meaning that 1 portion of the counting is registered on the display while the counting is still going on in the background
3. Press #2 will get you to the current counting

Alarm Function:

1. The function of the alarm can be armed or disarmed by pressing and holding #2 then pressing #1 together.
2. When alarm is on, it will display a bell on the upper right corner of the display.
3. When the alarm bell is on, and the normal time approaches the alarm time, the alarm will sound.
4. The alarm will stop itself after 60 seconds, or can be silenced by pressing #1. In either case, the alarm will sound again at the same time of next day.

Chime



1. When pressing and holding #2, by pressing #3 can turn on or turn off the chime function.
2. When the chime is on, the flags (abbreviated Days on the display) will show on the display

Snooze Function:

1. When alarm "beep, beep" is on, pressing #1 will enter into a snooze function. It means that the alarm will sound again after 5 minutes unless it is disabled by pressing #2.

Battery

For battery replacement, use LR44 or equivalent.

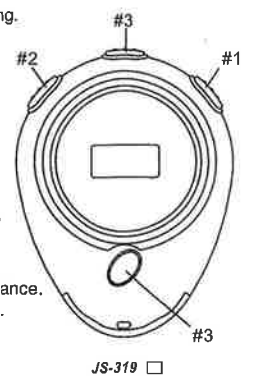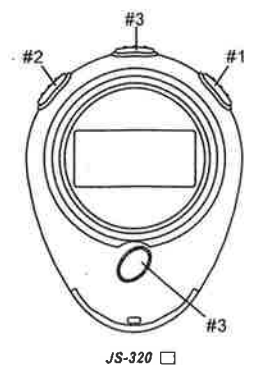

MADE IN CHINA